


TEST & MEASUREMENT ACCESSORIES

Full English Product Catalog

Product images, model numbers and technical specifications


Test Probes & Clips

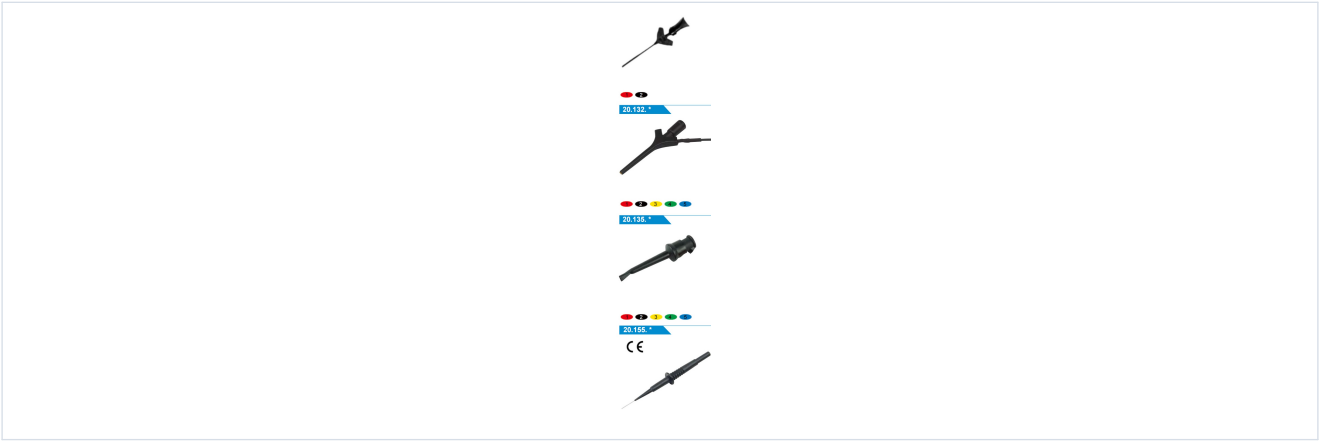

Model	English specification	Rating
20.131	Mini test clip with pin connection; PA insulator; brass body; gold-plated surface.	30 VAC-60 VDC / 2 A
20.132	Mini test clip with pin connection; PA insulator; brass body; gold-plated surface.	30 VAC-60 VDC / 2 A
20.135	Mini test clip with solder connection; PA insulator; brass body.	30 VAC-60 VDC / 10 A
20.165	Safety test probe with 4 mm socket; stainless-steel needle; PA insulator.	CAT II 600 V / 1 A
20.172	Safety test clip with 4 mm socket; PA insulator; brass/stainless-steel body.	CAT II 1000 V / 10 A
20.173	Safety clip with 4 mm socket and flexible spring-wire contact.	CAT II 1000 V / 10 A
20.211	Safety test probe with 4 mm socket connection on both ends.	CAT II 1000 V / 20 A
20.212	Safety probe with 4 mm socket; spring-loaded side with shrinkable tube.	CAT II 1000 V / 20 A
20.601	Safety test lead with insulated 4 mm spring-loaded probe and angled plug.	CAT II 1000 V / 10 A
20.602	Safety test lead with insulated probe and 4 mm angled plug.	CAT II 1000 V / 10 A

English-only reconstruction from the supplied source catalog. Company names, logos, websites, Chinese text, address pages and promotional/certification pages have been omitted.


Banana Plugs

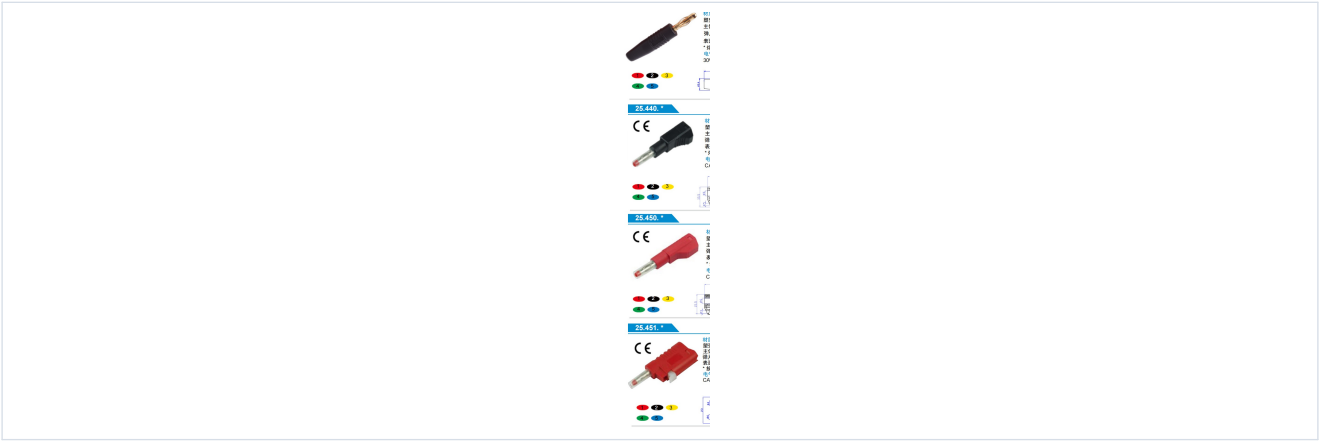

Model	English specification	Rating
25.436	PVC insulator; brass body; beryllium-copper spring; gold plated; solder connection.	30 VAC-60 VDC / 24 A
25.452	PA insulator; brass body; beryllium-copper spring; nickel plated; solder connection.	30 VAC-60 VDC / 32 A
25.440	PA insulator; brass body; beryllium-copper spring; nickel plated; solder connection.	CAT II 600 V / 32 A
25.454	PA insulator; brass body; beryllium-copper spring; nickel plated; solder connection.	30 VAC-60 VDC / 32 A
25.450	PA insulator; brass body; beryllium-copper spring; nickel plated; solder connection.	CAT II 600 V / 32 A
25.455	PA insulator; brass body; beryllium-copper spring; nickel plated; screw connection.	30 VAC-60 VDC / 32 A
25.451	PA insulator; brass body; beryllium-copper spring; nickel plated; solder connection.	CAT II 600 V / 32 A
25.500	PA insulator; brass body; beryllium-copper spring; nickel plated; solder connection.	CAT II 600 V / 32 A
25.501	PA insulator; brass body; beryllium-copper spring; nickel plated; solder connection.	CAT II 600 V / 32 A
25.505	PA insulator; brass body; nickel plated; solder connection.	CAT II 600 V / 19 A
25.502	PA insulator; brass body; beryllium-copper spring; nickel plated; solder connection.	CAT II 600 V / 32 A
10.011	ABS insulator; brass body; gold plated; screw connection.	30 VAC / 32 A
10.012	ABS insulator; steel body; gold plated; screw connection.	30 VAC / 32 A
25.503	PA insulator; brass body; beryllium-copper spring; nickel plated; screw connection.	CAT II 600 V / 32 A
25.504	Right-angle plug; PA insulator; brass body; beryllium-copper spring; nickel plated.	CAT II 600 V / 32 A

English-only reconstruction from the supplied source catalog. Company names, logos, websites, Chinese text, address pages and promotional/certification pages have been omitted.


Panel Sockets

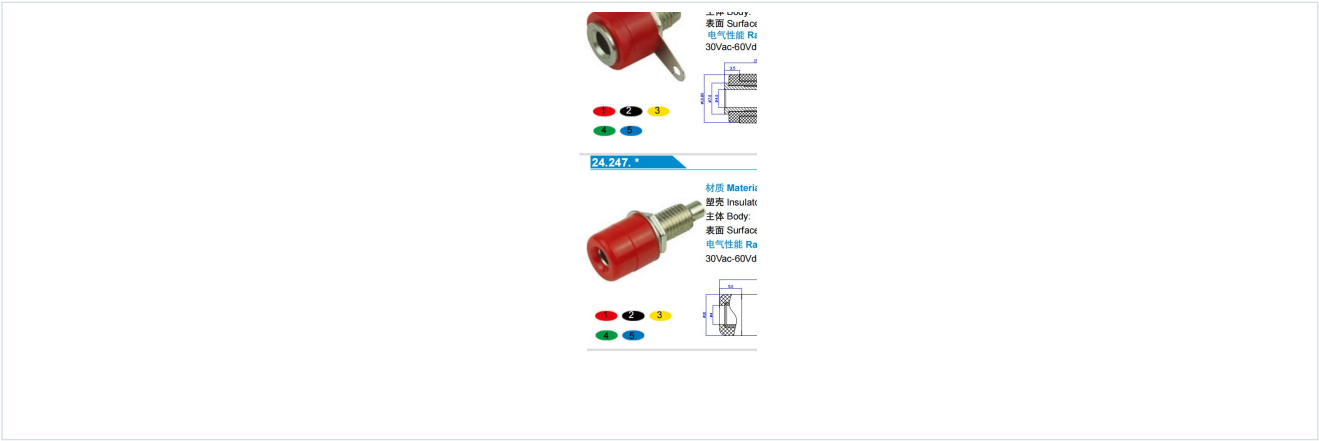

Model	English specification	Rating
24.246	ABS insulator; brass body; nickel-plated surface; panel mount.	30 VAC-60 VDC / 11 A
24.249	PA insulator; brass body; nickel-plated surface; panel mount.	30 VAC-60 VDC / 24 A
24.242	ABS insulator; brass body; nickel-plated surface; panel mount.	30 VAC-60 VDC / 24 A
24.260	PA insulator; brass body; nickel-plated surface; safety panel socket.	CAT II 1000 V / 32 A

English-only reconstruction from the supplied source catalog. Company names, logos, websites, Chinese text, address pages and promotional/certification pages have been omitted.


Binding Posts

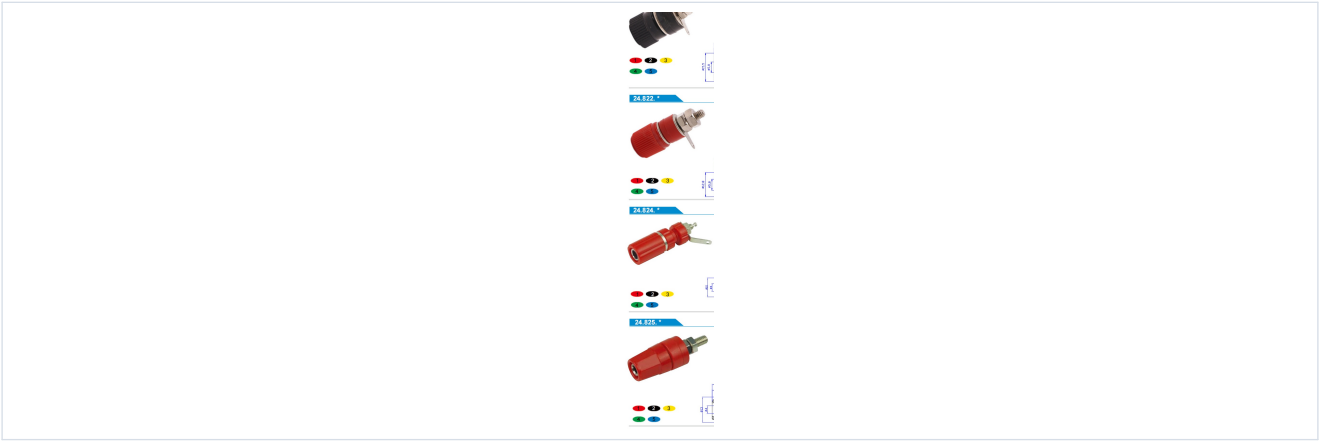

Model	English specification	Rating
24.821	ABS insulator; brass body; nickel-plated surface.	30 VAC-60 VDC / 24 A
24.826	ABS insulator; brass body; nickel-plated surface.	30 VAC-60 VDC / 19 A
24.822	ABS insulator; brass body; nickel-plated surface.	30 VAC-60 VDC / 24 A
24.827	ABS insulator; brass body; nickel-plated surface.	30 VAC-60 VDC / 24 A
24.824	ABS insulator; brass body; nickel-plated surface.	30 VAC-60 VDC / 24 A
24.828	ABS insulator; brass body; nickel-plated surface.	30 VAC-60 VDC / 24 A
24.825	ABS insulator; brass body; nickel-plated surface.	30 VAC-60 VDC / 24 A
24.829	ABS insulator; brass body; nickel-plated surface.	30 VAC-60 VDC / 24 A

English-only reconstruction from the supplied source catalog. Company names, logos, websites, Chinese text, address pages and promotional/certification pages have been omitted.


Test Leads

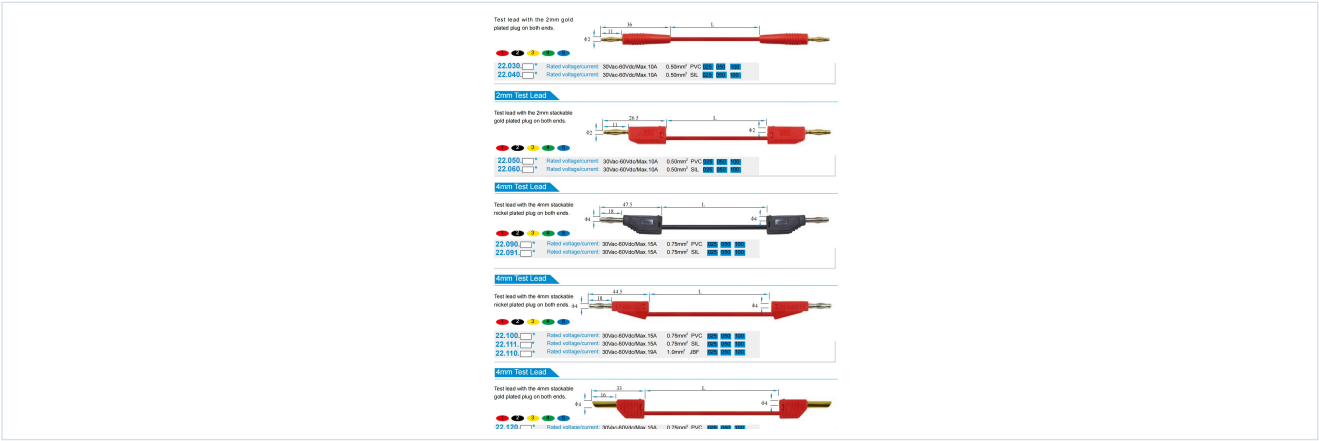

Models	English specification	Rating
22.030 / 22.040	2 mm gold-plated plug on both ends; 0.50 mm² PVC or silicone lead.	30 VAC-60 VDC / 10 A
22.050 / 22.060	2 mm stackable gold-plated plug on both ends; 0.50 mm² PVC or silicone lead.	30 VAC-60 VDC / 10 A
22.090 / 22.091	4 mm stackable nickel-plated plug on both ends; 0.75 mm² PVC/silicone.	30 VAC-60 VDC / 15 A
22.100 / 22.111 / 22.110	4 mm stackable nickel-plated plug; 0.75-1.0 mm² lead.	30 VAC-60 VDC / 15 A
22.120 / 22.121	4 mm stackable gold-plated plug on both ends; 0.75-1.0 mm² lead.	30 VAC-60 VDC / 19 A
22.162 / 22.171 / 22.172 / 22.173	Injected 4 mm stackable nickel-plated plugs; 0.75-2.5 mm² PVC/silicone.	30 VAC-60 VDC / 15-32 A
22.190 / 22.201	4 mm nickel-plated plug on both ends; 0.75 mm² silicone/PVC.	30 VAC-60 VDC / 15 A

English-only reconstruction from the supplied source catalog. Company names, logos, websites, Chinese text, address pages and promotional/certification pages have been omitted.


Safety Test Leads

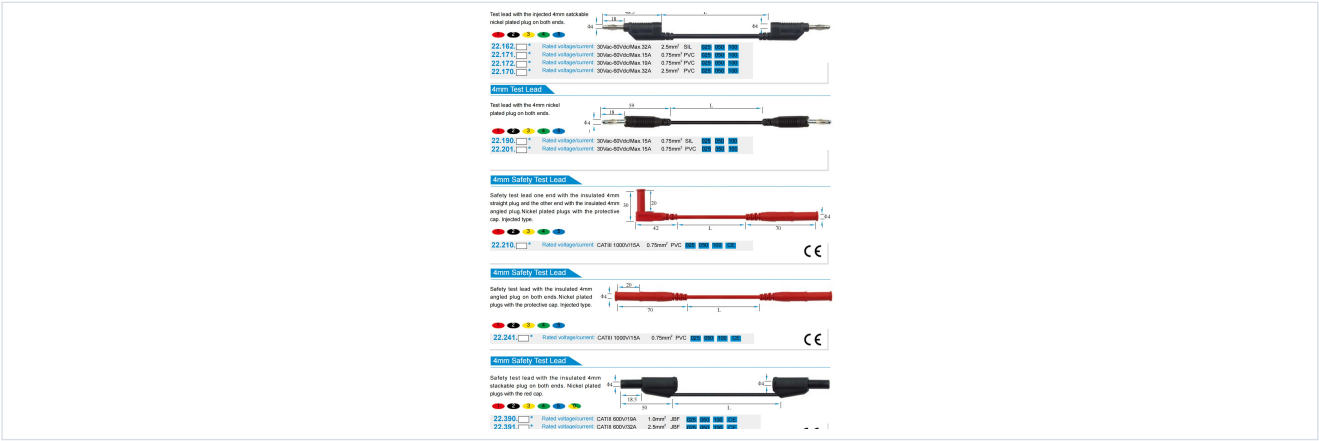

Models	English specification	Rating
22.210	Insulated 4 mm angled/straight safety plugs; nickel plated; protective cap; 0.75 mm² PVC.	CAT II 1000 V / 15 A
22.241	Insulated 4 mm angled plugs on both ends; nickel plated; protective cap.	CAT II 1000 V / 15 A
22.270-22.290	Insulated 4 mm straight plugs; nickel plated; protective caps; 0.75-2.5 mm² PVC.	CAT II 1000 V / 15-32 A
22.300-22.320	Insulated 4 mm straight plugs; nickel plated; protective caps; 0.75-2.5 mm² PVC.	CAT II 1000 V / 15-32 A
22.380 / 22.391 / 22.401	Insulated 4 mm stackable plugs; nickel plated; protective cap; 1.0-2.5 mm².	CAT II 600 V / 19-32 A
22.420 / 22.421 / 22.410	Insulated 4 mm straight plugs; nickel plated; protective cap; 1.0-2.5 mm² PVC.	CAT II 600-1000 V / 19-32 A
22.450 / 22.451 / 22.470	4 mm stackable safety plugs; nickel plated; shrinkable tube on red cap.	CAT II 600 V / 19-32 A
22.460 / 22.461 / 22.480 / 22.491	4 mm stackable safety plugs; nickel plated; 0.75-2.5 mm² PVC.	CAT II 1000 V / 15-32 A
22.510 / 22.520	4 mm stackable plug to 35 mm right-angle insulated contact.	30 VAC-60 VDC / 15 A
22.570 / 22.580	4 mm stackable plug to 25.5 mm shrouded contact.	30 VAC-60 VDC / 15 A
22.900 / 22.901	Insulated 4 mm stackable plugs with protective cap; 0.75 mm² PVC.	CAT II 1000 V / 15 A

English-only reconstruction from the supplied source catalog. Company names, logos, websites, Chinese text, address pages and promotional/certification pages have been omitted.

BNC Adapters & Breakouts

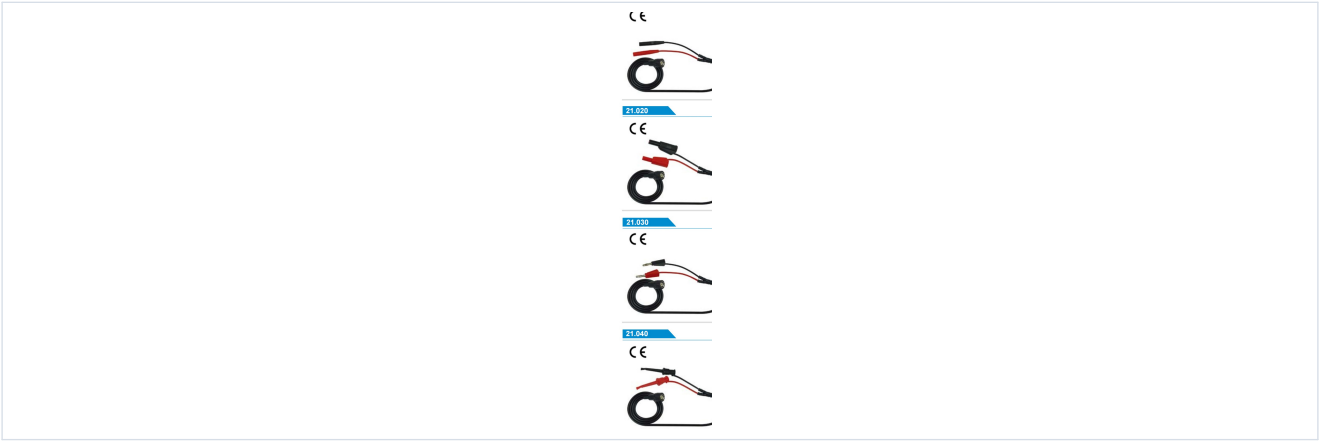

Model	English specification	Rating
21.010	Insulated BNC male to 2 x 4 mm straight safety plugs; RG58/U, approx. 1.2 m.	CAT I 600 V; CAT II 50 V / 3 A
21.020	Insulated BNC male to 2 x 4 mm stackable safety plugs; RG58/U, approx. 1.2 m.	CAT I 600 V; CAT II 50 V / 3 A
21.030	Insulated BNC male to 2 x 4 mm stackable plugs; RG58/U, approx. 1.2 m.	CAT I 600 V; CAT II 50 V / 3 A
21.040	Insulated BNC male to 2 mm test clips; RG58/U, approx. 1.2 m.	CAT I 600 V; CAT II 50 V / 3 A

English-only reconstruction from the supplied source catalog. Company names, logos, websites, Chinese text, address pages and promotional/certification pages have been omitted.

Crocodile Clips



Model	English specification	Rating
27.607	PA insulator; brass body; nickel plated.	30 VAC-60 VDC / 10 A
27.257	PA insulator; brass body; nickel plated.	30 VAC-60 VDC / 16 A
27.258	PA insulator; brass body; nickel plated.	CAT II 300 V / 16 A
27.259	ABS insulator; steel body; nickel plated.	30 VAC-60 VDC / 10 A
27.260 / 27.262 / 27.263	PA insulator; brass body; nickel plated; safety clip family.	CAT II 1000 V / 32 A
27.704	PVC insulator; brass body; nickel plated.	Standard clip
27.710 / 27.711 / 27.712	PVC insulator; steel body; nickel plated.	Standard clip
27.714 / 27.715 / 27.717 / 27.718 / 27.719	PVC/ABS insulator; steel body; nickel plated.	Standard clip
27.720 / 27.722 / 27.723	PVC insulator; steel body; nickel plated.	Selected models up to 30 A

English-only reconstruction from the supplied source catalog. Company names, logos, websites, Chinese text, address pages and promotional/certification pages have been omitted.


Cable Specifications



Item No.	Type / Cross Section	Outer Dia.	Rated Voltage / Current
011.0046	PVC - 0.5 mm ² / 20 AWG	2.3 mm	1500 V / 10 A
011.0137	PVC - 0.75 mm ² / 18 AWG	2.8 mm	1500 V / 15 A
011.0044	PVC - 1.00 mm ² / 17 AWG	3.9 mm	1500 V / 19 A
011.0043	PVC - 2.50 mm ² / 13 AWG	3.9 mm	1500 V / 32 A
011.0054	Silicone - 0.35 mm ² / 22 AWG	1.7 mm	1500 V / 7 A
011.0078	Silicone - 0.50 mm ² / 20 AWG	1.8 mm	1500 V / 10 A
011.0061	Silicone - 0.75 mm ² / 18 AWG	2.8 mm	1500 V / 15 A
011.0063	Silicone - 1.00 mm ² / 17 AWG	3.6 mm	1500 V / 19 A
011.0058	Silicone - 1.30 mm ² / 16 AWG	3.0 mm	1500 V / 24 A
011.0059	Silicone - 2.10 mm ² / 14 AWG	3.5 mm	1500 V / 35 A
011.0136	Silicone - 2.50 mm ² / 13 AWG	3.9 mm	1500 V / 50 A
011.0060	Silicone - 3.40 mm ² / 12 AWG	4.5 mm	1500 V / 70 A
011.0119	Silicone - 6.30 mm ² / 10 AWG	5.5 mm	1500 V / 105 A
011.0134	Silicone - 13.30 mm ² / 8 AWG	6.7 mm	1500 V / 165 A

English-only reconstruction from the supplied source catalog. Company names, logos, websites, Chinese text, address pages and promotional/certification pages have been omitted.

Test Kits

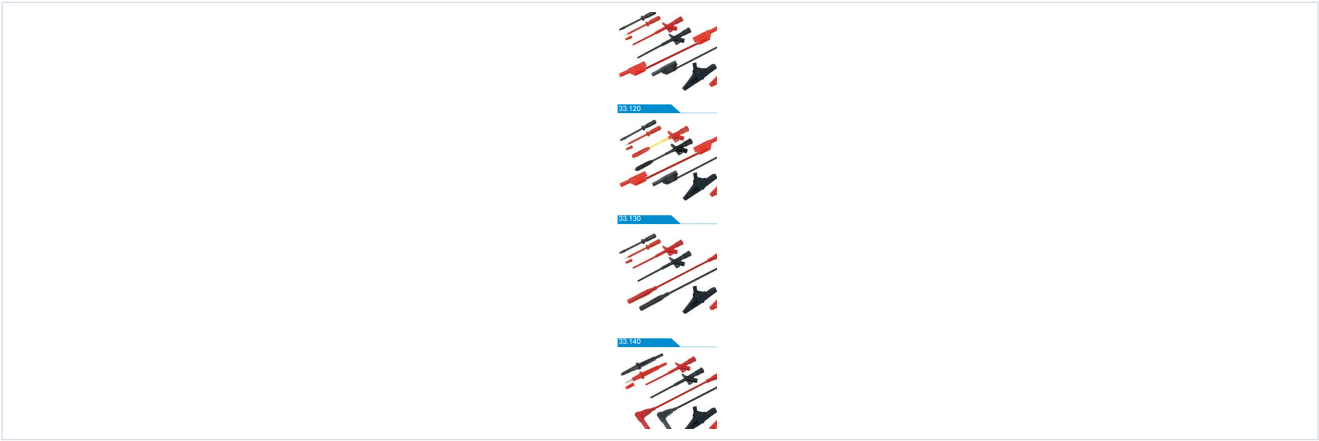

Kit	Contents
33.110	2 x safety lead 22.420; 2 x probe 20.164; 2 x safety crocodile clip 27.262; 2 x test clip 20.169
33.120	2 x safety lead 22.420; 2 x probe 20.164; 2 x safety crocodile clip 27.262; 2 x probe 20.168
33.130	2 x safety lead 22.310; 2 x probe 20.164; 2 x safety crocodile clip 27.262; 2 x test clip 20.169
33.140	2 x safety lead 22.280; 2 x probe 20.157; 2 x safety crocodile clip 27.262; 2 x test clip 20.169
33.150	2 x safety lead 22.280; 2 x test lead 22.530; 2 x probe 20.157; 2 x safety crocodile clip 27.262
33.310	Safety leads, probes, crocodile clips and test clips; packed in tool bag.
33.320	Safety leads, test leads, probes, crocodile clips, test clips and connecting plugs; packed in tool bag.

English-only reconstruction from the supplied source catalog. Company names, logos, websites, Chinese text, address pages and promotional/certification pages have been omitted.